

Public Building Project: CRIPA

Rehearsal Hall for CRIPA (Centre for Research in the Performing Arts)

Project Information:

Project Holders : Jill, Nuria and Matthew

Architects : David Nightingale and Ganesh Bala

Structural Engineer : Thamizharasan, Pondicherry.

Contractor : Bhaskar and Ajay

Acoustic Consultant : Didier, Sound Wizard, Auroville.

Lighting Consultant : Venky, Arclite Architectural Pvt.Ltd., Chennai.


Construction Started : January 2008


Status : Under Construction

Target date of completion – October 2010

Site : Cultural Zone, near Aurofilm

Funding – SAIIER/ Government of India.

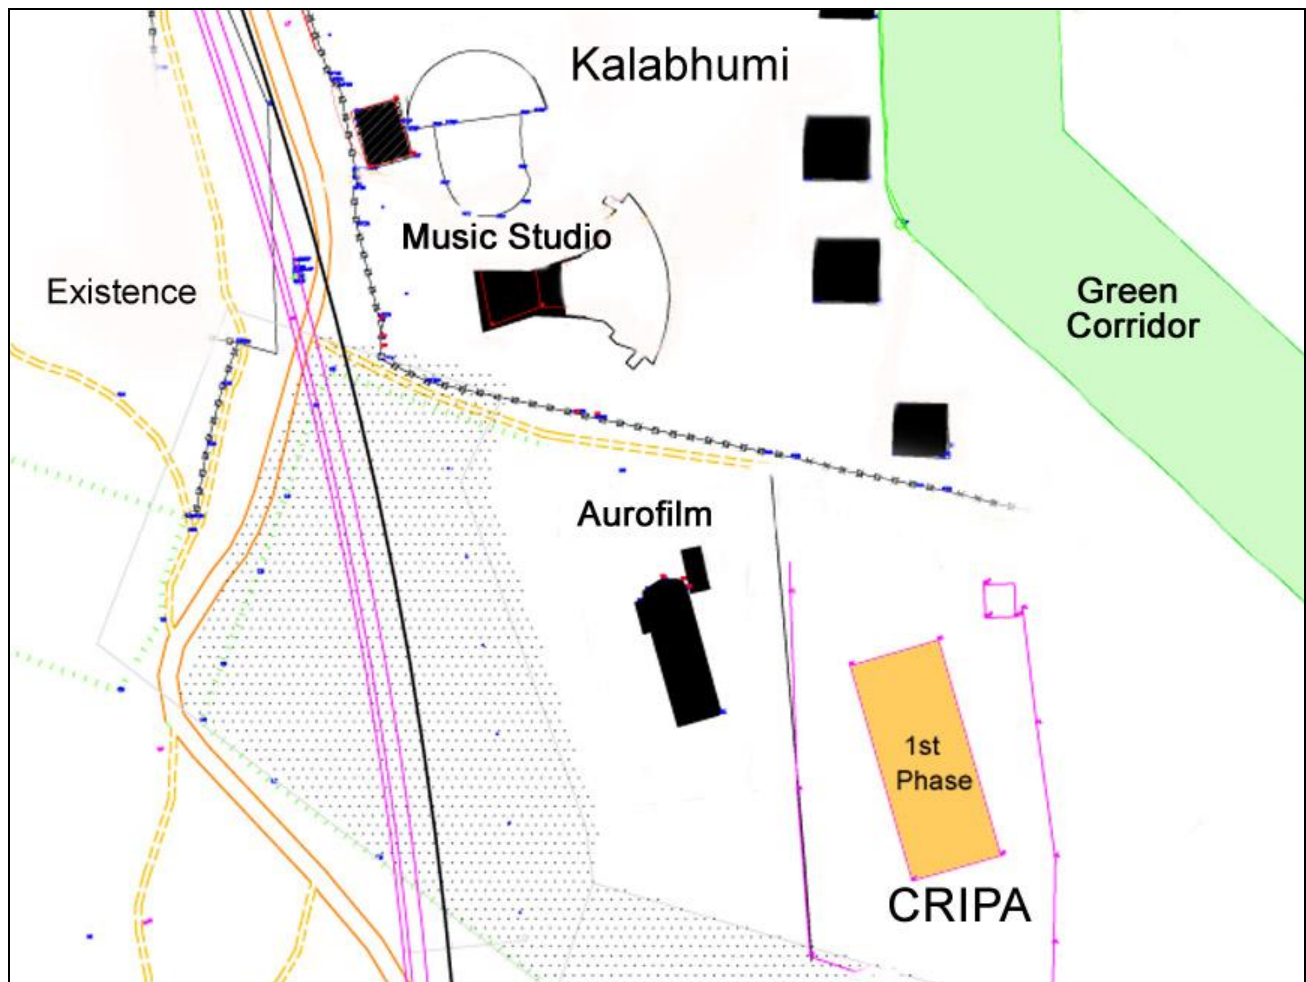

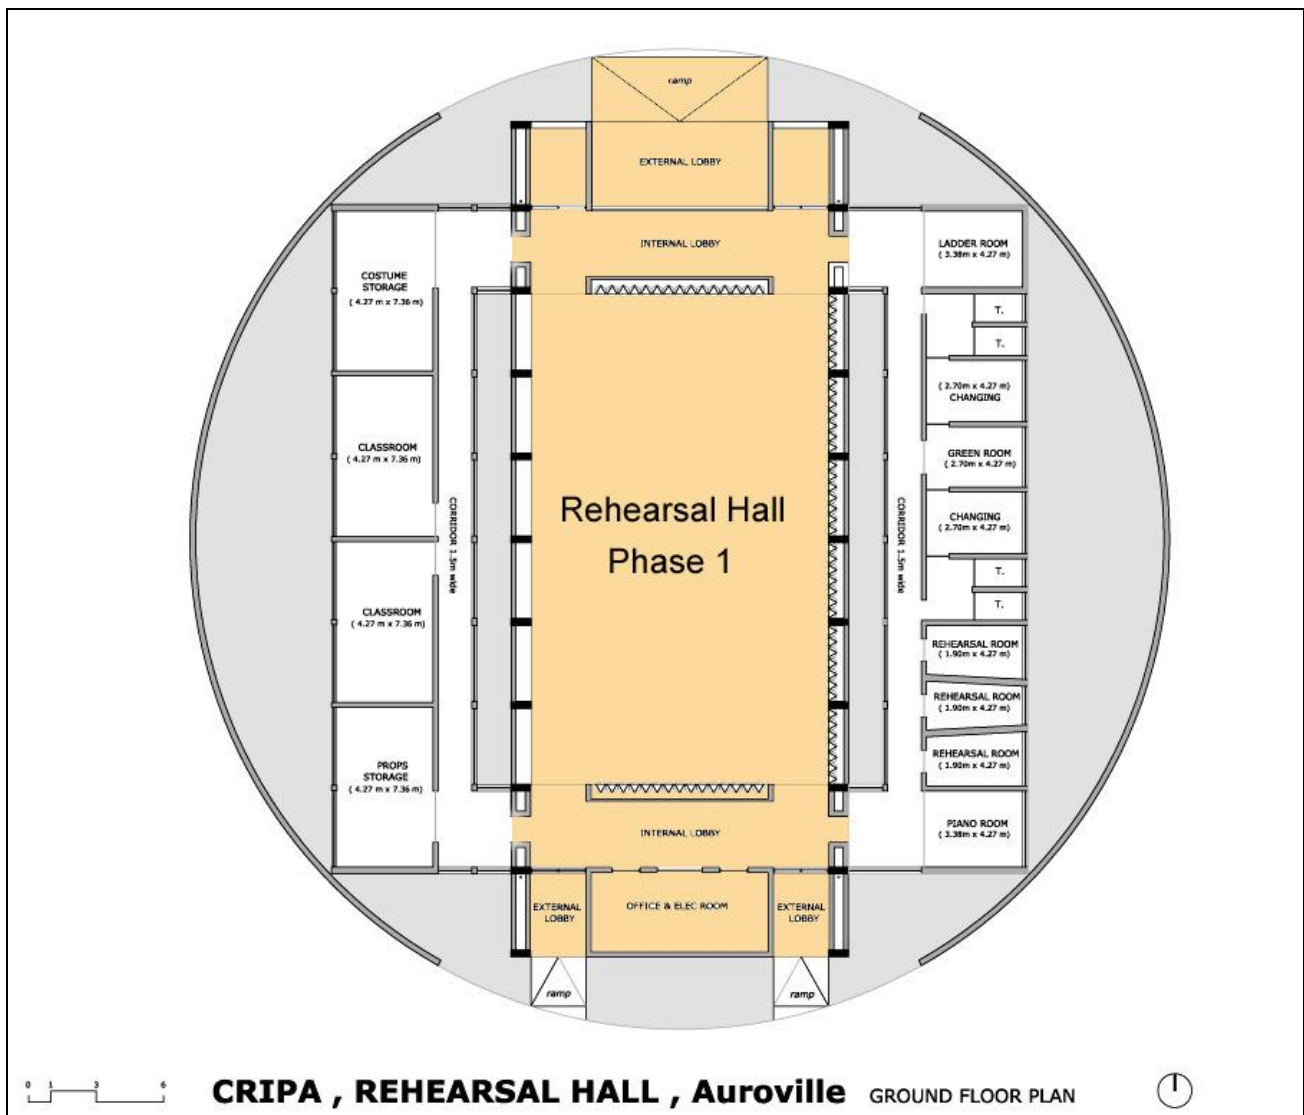

Building Information:

Ground floor – 557 sqm – Rehearsal Hall with wooden flooring, Piano room/office, temporary toilets and electrical room.

Materials used – RCC framed structure with Aerocon blocks.

Inner Finishes/ Material – 'Work' tree sprung floor, Rotatable Acoustic Ceiling Panels and Wall panels have been designed for use in multiple combinations.

Water Harvesting: Projected for the coming phases.

Waste Water Treatment – The full treatment system is foreseen once the permanent toilets and changing facilities are built in the second phase

Description :

The Rehearsal Hall is the first phase of the complex for the Centre for Research in the Performing Arts.

The building has been funded by SAIER/GOI and will be built in phases.

The first phase (557 sqm) is under completion and the funding for the second phase (410 sqm) has been applied for.



... Works in progress ...

